


MEHRFACHSTECKGEHÄUSE



Für Flachsteckungen und Flachsteckhülsen.

- Für Steckbreite 6,3 x 0,8 mm
- Material: Polyamid, natur
- Temperaturbeständigkeit: -40°C bis +80°C

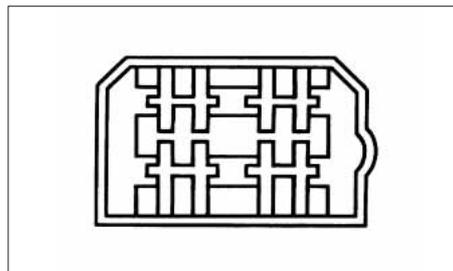

Steckanschlüsse Anz. / Abb.	Art.-Nr.	VE St.
1 / -	0555 100 1	25
2 / =	0555 100 2	25
2 / 1 -	0555 100 22	25
3 / = 1	0555 100 3	25
4 / = =	0555 100 4	25
6 / = = =	0555 100 6	25
8 / = = = =	0555 100 8	25

ORSY®-lagerfähig




Flachsteckungen 6,3 x 0,8 mm

- Mit Rastzunge
- Verzinkt

mm ²	Art.-Nr.	VE St.
0,5-1,0	0558 996 0	100
1,5-2,5	0558 991 8	100
4,0-6,0	0558 996 3	100

ORSY®-lagerfähig

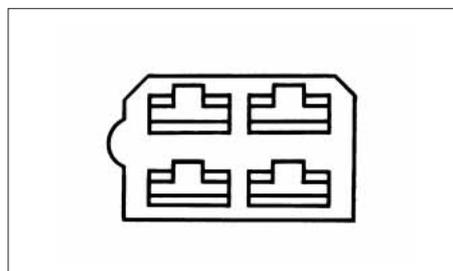

Steckanschlüsse Anz. / Abb.	Art.-Nr.	VE St.
1 / -	0555 100 11	25
2 / =	0555 100 21	25
2 / 1 -	0555 100 23	25
3 / = 1	0555 100 31	25
4 / = =	0555 100 41	25
6 / = = =	0555 100 61	25
8 / = = = =	0555 100 81	25

ORSY®-lagerfähig



Flachsteckhülsen 6,3 x 0,8 mm

- Mit Rastzunge
- Verzinkt

mm ²	Art.-Nr.	VE St.
0,5-1,0	0558 991 6	100
1,5-2,5	0558 991 7	100
4,0-6,0	0558 996 2	100

ORSY®-lagerfähig



POS Lock Isolierhülse

- Farbe: schwarz
- Material: Nylon
- Für Flachsteckhülsen
Art.-Nr. 0558 160 71 bis
Art.-Nr. 0558 160 79

Art.-Nr. 0558 101 1

VE/St. 10

ORSY®-lagerfähig